



IM500 INDUSTRIAL IoT MODULE

FEATURES

- Dual thermal and visual camera
- Secure Cellular connection to IoT Cloud
- I/O connections enable external sensors
- Low power consumption
- Optional connection to SCADA/GIS and asset management applications


KEY BENEFITS

- High reliability operation in extreme environments, low maintenance costs
- Simple to install and maintain
- Early detection of heat, flooding, tampering etc. to prevent failures and outages
- Analytics provide real time operator alerts
- Optimized data usage with adjustable polling rates

The IM500 Industrial IoT Module monitors and collects asset health data from remote sites. Thermal monitoring mitigates the risks of failure from overheating assets and connection points. Analytics detect anomalies and provide automatic warnings. The visual camera provides situational awareness in remote locations.

The IM500 can enable flood warning and other safety, environmental and quality monitoring with externally connected sensors. Signals are transmitted securely from the device to a dashboard on a phone, laptop or other platform. Remote updates ensure the firmware is current as well as enabling customization of the devices.

INDUSTRIAL IOT ARCHITECTURE

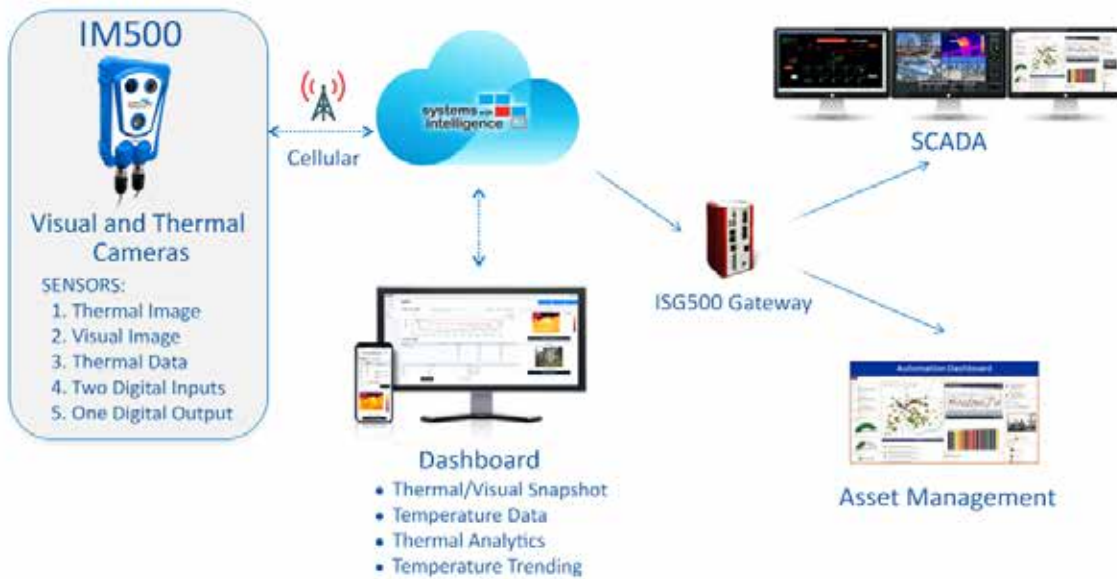

DASHBOARD

- Monitor the site and control remote sensor module
- Thermal trending of monitored assets
- Thermal and visual snapshots
- Configure thermal analytics and alarms

CONNECTED SENSORS

- Onboard I/O allows connection of external sensors
- Monitor water level, door closures, temperature etc.
- Adjust polling rates

WIRELESS COMMUNICATION

- Cellular wireless communications
- Secure encrypted connection to SWI cloud
- Bi-directional data flow

UTILITY GRADE

- Designed for the harsh conditions found in electric power environments
- Immune to the effects of EMI, ESD and voltage surges and interrupts



Dashboard example


TECHNICAL SPECIFICATIONS

IM500 SPECIFICATIONS	
THERMAL	
Resolution	160 x 120 pixels
Detector Type	Uncooled Vox Microbolometer
Spectral range	8 to 14 μ m
Field of View (H)	57°
Frame Rate	8.7 Hz (exportable)
VISUAL CAMERA	
Resolution	800 x 600 pixels
Sensor	1/4" CMOS
Field of View (H)	71.50° ~2.4°
FLASH Light	LED, pulsed
NETWORK/SOFTWARE	
Cellular	3G, LTE-M*
Software interface	SWI IoT Cloud
Camera Snapshot	Scheduled or Alarm triggered
Thermal reporting	Thermal box comparison Absolute temperature trigger
Thermal analytics	UP to 15m (49ft)
Others	IO control, Email, Map (location), Historical alarms, Camera Setup
DNP3 (optional)	via SWI CloudDNP setup

IO	
Digital Input	2 - wet contact (12 - 24VDC)
Solid State Relay	1 - 30VDC, 500mA
POWER	
Vin	12VDC nominal (9 to 14VDC)
Power consumption	~1W nominal (no flash)
Power Supply requirement	at least 5W per device
ENVIRONMENTAL	
IP Rating	IP67
Op. Temp	-10° C to 75° C
Storage Temp	-40° C to 85° C
MECHANICAL	
Dimensions	78.5mm x 126.5mm x 1.45 mm
Enclosure	UV resistant Plastic
Connector	M12 - 4 pin Power input M12 - 8 pin IO

Note: * Available soon.

DIMENSIONS Unit: inches (mm)

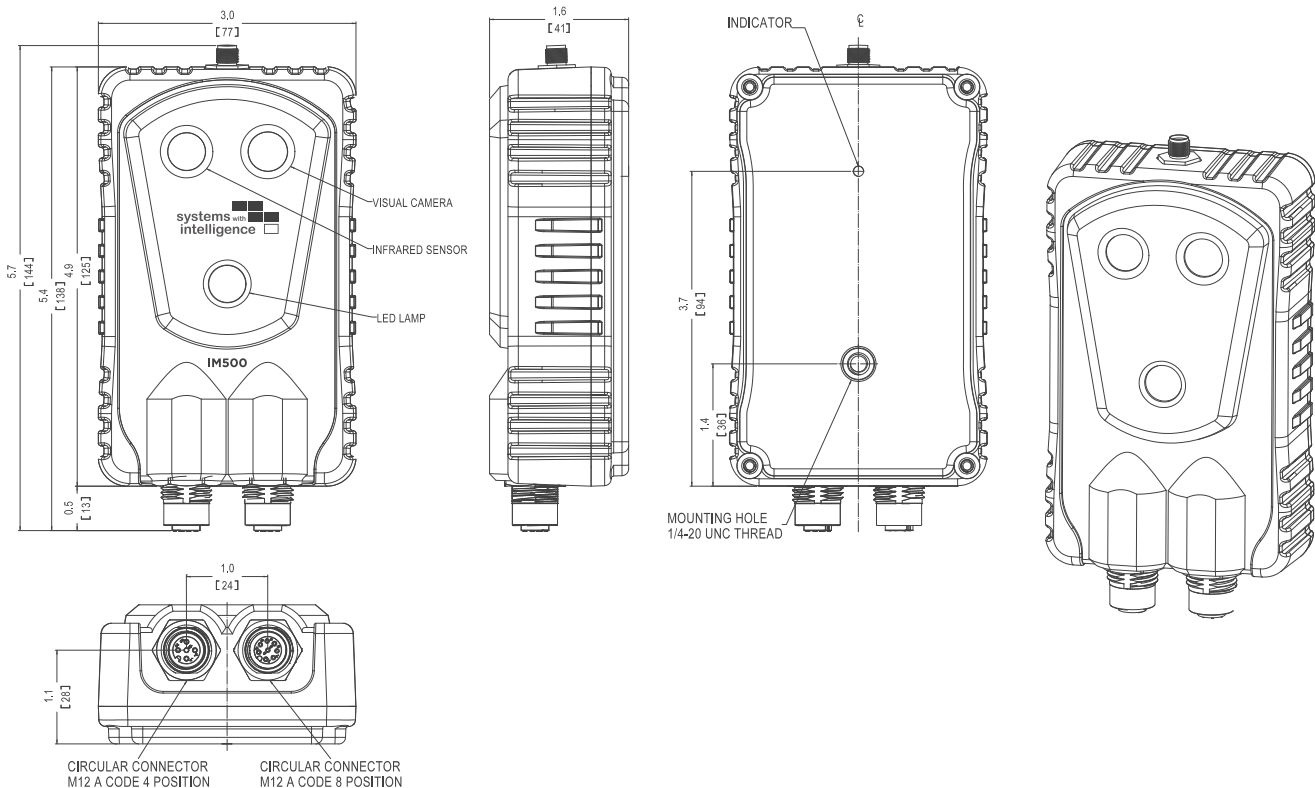

CONFIGURATION

Order Code example : IM500-CM-AO-PL

Base Unit	
IM500	Visual and Thermal Camera. 60 snapshots a month. Thermal readings every 15 minutes. 2 digital inputs and 1 digital output. 12VDC Input. 2 Years Warranty. Cables and arm not included
Communications (CM)	
3G	3G cellular communication
LT	LTE-M cellular communication (available soon)
Additional Options (AO)	
EA	External Antenna
XX	None
Access to SWI Platform (PL)	
SK	6 Months Access to SWI Cloud Included (only available for Starter Kits)
01	1 Year Access to SWI Cloud Included
02	2 Year Access to SWI Cloud Included
03	3 Year Access to SWI Cloud Included
04	4 Year Access to SWI Cloud Included
05	5 Year Access to SWI Cloud Included

Upgrades	
IM500-WR01	1-year extended warranty for IM500
IM500-PL01	1-year access to cloud for IM500
IM500-SA08	Increase snapshot limit to 240 snapshots/month for one year
IM500-SA12	Increase snapshot limit to 365 snapshots/month for one year
IM500-SA24	Increase snapshot limit to 730 snapshots/month for one year
IM500-SA48	Increase snapshot limit to 1450 snapshots/month for one year

Accessories	
SM-A01	Mounting arm for IM500 (flat surface)
CJBSM-05	Junction box supports 5 x IM500
CJBSM-SL	Junction box with solar panel supports 2 x IM500
PCSM-MF 4P-10	Male to female power cable from Junction box to IM500. 10m length
PTSM-M8P-01	Pig tail for DIO connector

STARTER KIT OPTIONS:

EXIPCAM1500 - CERTIFICATIONS AND MARKINGS (WITH CABLE)	
M500-SK2-3G-XX	2xIM500 starter kit. Includes junction box, cables, mounting arms and 6 months access to the SWI cloud resources.
M500-SK2-3G-SL	2xIM500 starter kit. Includes solar powered junction box, solar panel, cables, mounting arms and 6 months access to the SWI cloud resources. Battery not included.
M500-SK5-3G-XX	5xIM500 starter kit. Includes junction box, cables, mounting arms and 6 months access to the SWI cloud resources.



Systems With Intelligence Inc.
6889 Rexwood Road, Unit #9
Mississauga, Ontario, CANADA
L4V 1R2

Tel: +1-289-562-0126
Fax: +1-289-562-0152

General Inquiries:

info@SystemsWithIntelligence.com

Sales Inquiries:

sales@SystemsWithIntelligence.com

Product Support:

support@SystemsWithIntelligence.com

All specifications in this document are subject to change without notice.

© Copyright 2019 Systems With Intelligence Incorporated. All rights reserved.